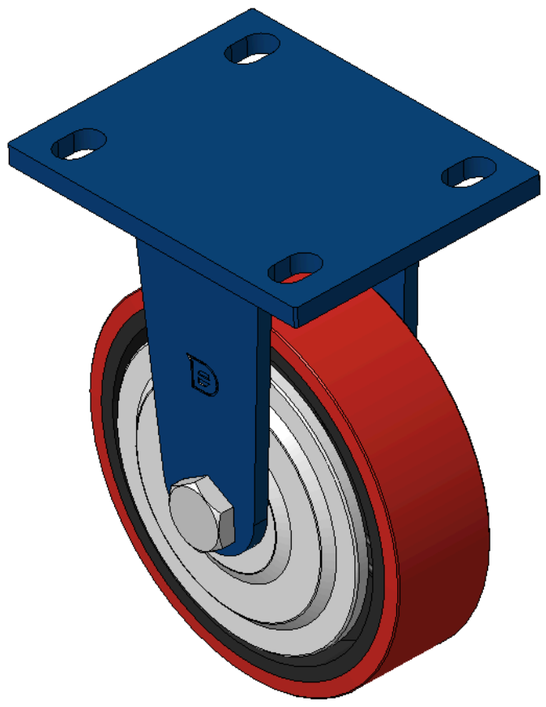




Picture may differ from original product

1102 B Type Caster Series

# PU (Red Flat) Wheel Diameter × Wheel Width 150 × 42 mm

KS-11020600331041 Copy model no.

| Wheel Diameter | Load Capacity (Dynamic) | Overall Height | Wheel Bearing |
|---|---|---|---|
| 150mm | 400kgs | 197mm | Wheels With Ball Bearings |

- Rigid Casters, Welded Caster Fork
- Blue painted finish, Mounting Type - Top Plate, 105x77.5mm Bolt Hole Spacing
- Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red
- Bearings—Ball Bearings
- Wheel Tread: Hhigh-Quality Polyurethane
- Wheel Center: iron core/cast iron

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet (Metric) | 3D Drawing Request

3D drawings are for members only. Please log in to download.

## Product Data Sheet

Metric | Imperial

| | | | |
|---|---|---|---|
| Wheel Diameter | 150mm | Wheel Width | 42mm |
| Wheel Bearing | Wheels With Ball Bearings | Plate Size | 140 x 110mm |
| Bolt Hole Spacing | 105 x 77.5mm | Plate Hole | 20 x 13mm |
| Overall Height | 197mm | Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 400kgs | Load Capacity (Static) | 600kgs |
| Temperature | -20°C to +70°C | Fork Type | Rigid Caster |
| Stainless | N/A | Electrical Conductivity | N/A |
| Anti-Static | N/A | Weight | 3.58kgs |
| Standard | ISO22883 | | |

* For any deviation between metric and imperial spec, please refer to the metric spec.

## Performance

**Rolling Smoothness**
Max. 5 points Score: 3

**Quiet Operation**
Max. 5 points Score: 4


**Floor Surface Preservation**
Max. 5 points Score: 4

## Downloads

PDF **1102-EN-KS2026112012.pdf**
Product Data Sheet (Metric)

3D **1102-CN-KS2026112012-d261120131028.rar**
3D drawings are for members only. Please log in to download.

## Related Products

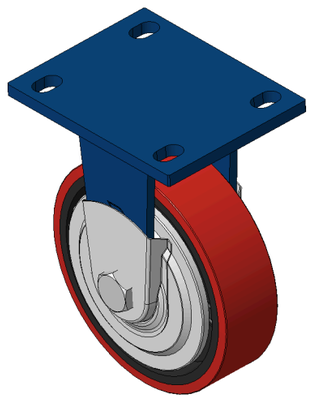

1102 B Type Caster Series

**PU (Red Flat) Wheel Diameter × Wheel Width 150 × 42 mm**

KS-11020600331081

| wheel diameter | dynamic load | overall height |
|---|---|---|
| 150 mm | 400 kg | 197 mm |

View specs →