

Choose another country or region to see content specific to your location.
United States & Other Regions
Continue



Picture may differ from original product

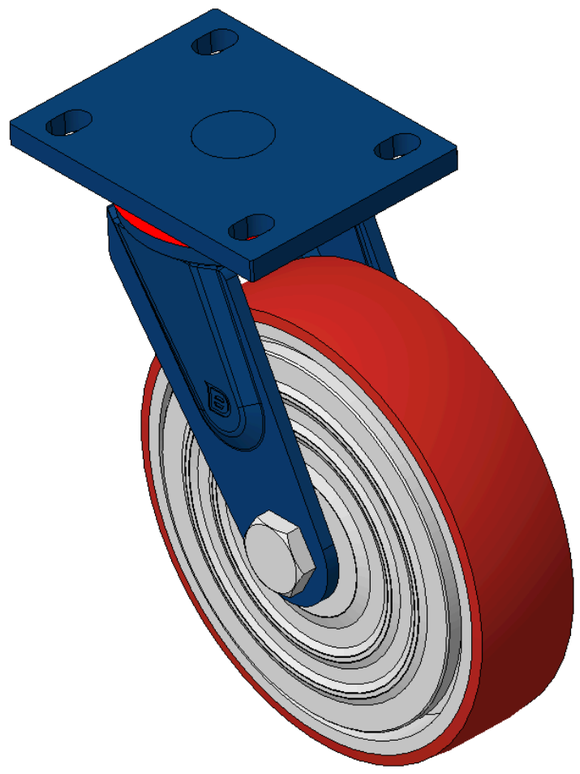



1102 B Type Caster Series

PU (Red round) Wheel Diameter × Wheel Width 200 × 50mm

KS-11020800332121 Copy model no.

Wheel Diameter	Load Capacity per Wheel (Dynamic)	Overall Height	Wheel Bearing
200mm	450kgs	248mm	Wheels With Ball Bearings

- Modible Casters, Welded Caster Fork
- Blue paint finish, plate Mounting Type, 105x77.5mm Bolt Hole Spacing
- Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red
- Bearings—Ball Bearings
- Wheel Tread: Hhigh-Quality Polyurethane
- Wheel Center: Iron core / Cast iron core

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet | 3D Drawing Request

3D drawings are for members only. Please log in to download.

Product Data Sheet

Metric | Imperial

Wheel Diameter	200mm	Wheel Width	50mm
Wheel Bearing	Wheels With Ball Bearings	Plate Size	140 x 110mm
Bolt Hole Spacing	105 x 77.5mm	Plate Hole	20 x 13mm
Offset	62mm	Swivel Interference	330mm
Overall Height	248mm	Swivel Radius	165mm
Hardness Of Tread	92±5° Shore A	Load Capacity per Wheel (Dynamic)	450kgs
Load Capacity per Wheel (Static)	675kgs	Temperature	-20°C to +70°C
Fork Type	Swivel Caster	Stainless	N/A
Electrical Conductivity	N/A	Anti-Static	N/A
Weight	6.4kgs	Standard	ISO22883

* For any deviation between metric and imperial spec, please refer to the metric spec.

Performance

Rolling Smoothness
Max. 5 points Score: 3

Quiet Operation
Max. 5 points Score: 4


Floor Surface Preservation
Max. 5 points Score: 4

Downloads

PDF **1102-EN-KS2026112619.pdf**
Product Data Sheet

3D **1102-CN-KS2026112619-d261126134113.rar**
3D drawings are for members only. Please log in to download.

Related Products

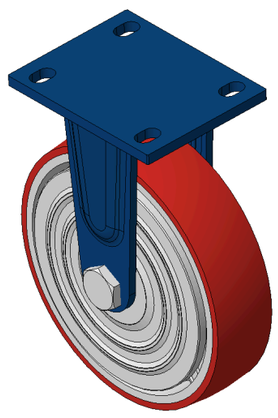


1102 B Type Caster Series

KS-11020800331141 PU (Red round) Wheel Diameter × Wheel Width 2…

wheel diameter	dynamic load	overall height
200 mm	450 kg	248 mm

View specs →

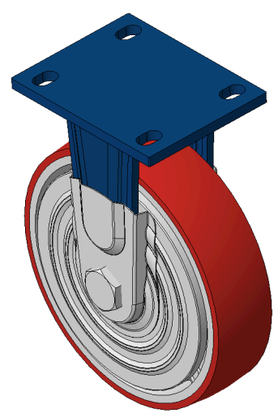

1102 B Type Caster Series

KS-11020800331161 PU (Red round) Wheel Diameter × Wheel Width 2…

wheel diameter	dynamic load	overall height
200 mm	450 kg	248 mm

View specs →