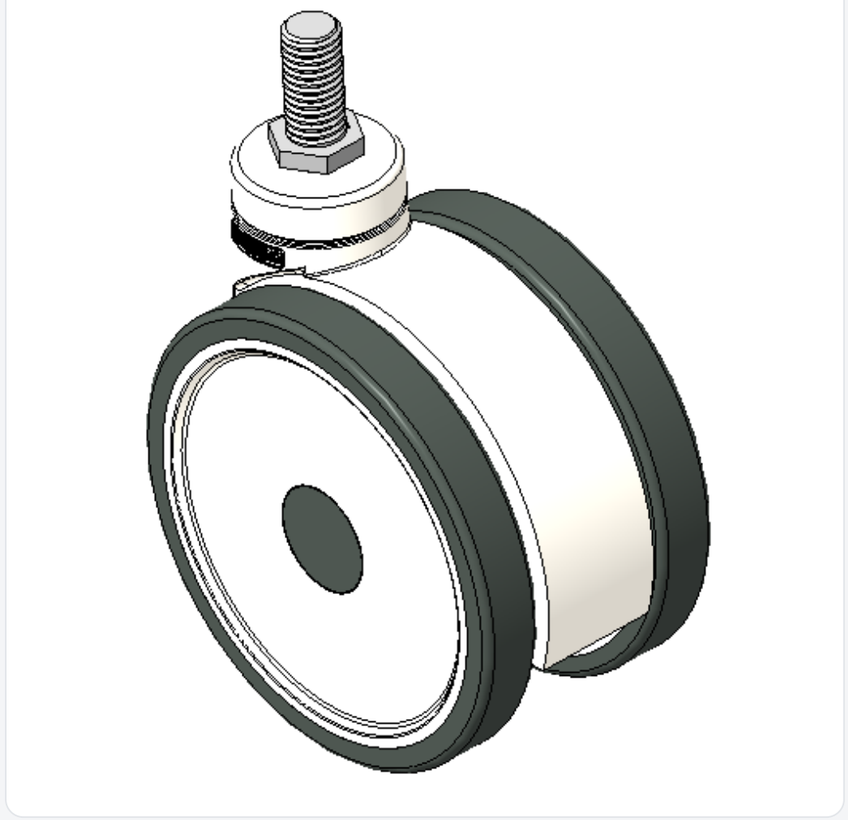




Picture may differ from original product

1110-3 Series — Medi Series

PPR Wheel Insert (White Dark Gray) Wheel Diameter×Wheel Width 100×14（60.5） mm

KS-11100402265013 Copy model no.

Wheel Diameter	Load Capacity (Dynamic)	Overall Height	Wheel Bearing
100mm	50kgs	120mm	Wheel With Plain Bearing

- Active double ball Casters, Threaded Stem M12x25
- White legs made of reinforced Polypropylene, Threaded Stem installation
- Rust-proof, Corrosion resistant, Attractive appearance, Economical, and rotates smoothly
- High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
- Dark gray, Plain Bearings
- Wheel tread: Thermoplastic rubber elastomer (TPR)
- Wheel Center: Made of high-quality impact-resistant polypropylene

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet | 3D Drawing Request

3D drawings are for members only. Please log in to download.

Product Data Sheet

Metric | Imperial

Wheel Diameter	100mm	Wheel Width	60.5mm
Wheel Bearing	Wheel With Plain Bearing	Threaded Stem	M12
Threaded Length	25mm	Offset	28mm
Swivel Interference	168mm	Overall Height	120mm
Swivel Radius	84mm	Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	50kgs	Load Capacity (Static)	75kgs
Temperature	-20°C to +60°C	Fork Type	Swivel Caster
Stainless	N/A	Electrical Conductivity	N/A
Anti-Static	N/A	Weight	0.48kgs
Standard	ISO22881		

* For any deviation between metric and imperial spec, please refer to the metric spec.

Performance

Rolling Smoothness
Max. 5 points Score: 4

Quiet Operation
Max. 5 points Score: 4


Floor Surface Preservation
Max. 5 points Score: 5

Downloads

PDF **1110-EN-KS2026041301.pdf**
Product Data Sheet

3D **1110-CN-KS2026041301-d261120145811.zip**
3D drawings are for members only. Please log in to download.

Related Products

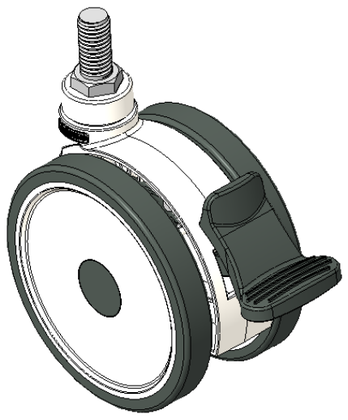

1110-3 Series — Medi Series

PPR Wheel Insert (White Dark Gray) Wheel Diameter×Wheel Width···

KS-11100402266013

wheel diameter	dynamic load	overall height
100 mm	50 kg	120 mm

View specs →