◄ Back | Product Data Sheet (Metric) | Product Data Sheet (Imperial) | 3D image files


Product Information Sheet

1124 1-1/2" Wide General Purposes Caster Series

PU (Red Flat) Wheel Diameter × Wheel Width 150 × 42 mm

EAN

YJ-11240600334413

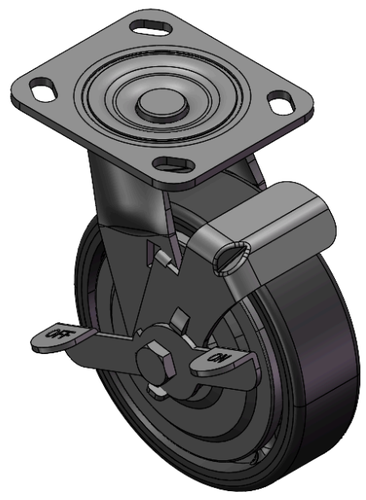

Equipped with Side Brakes and a With locking system for the Casters. Riveted and Stamping Top Plate legs 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing.
Zine-Plated surface, Top Plate type (4.5T) Mounting Type device.
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread.
Cast Iron red, Bearing—Ball Bearings.

Wheel Tread: Hhigh-Quality Polyurethane
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


◉ Metric ○ Imperial

Wheel Diameter	150mm
Wheel Width	42mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	39mm
Swivel Interference	224mm
Overall Height	189mm
Swivel Radius	112mm
Hardness Of Tread	93±5° Shore A
Load Capacity (Dynamic)	600kgs
Load Capacity (Static)	900kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.32kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	●●●○○
Operating Noise	●●●●○
Floor Surface Preservation	●●●●○

Dimensions

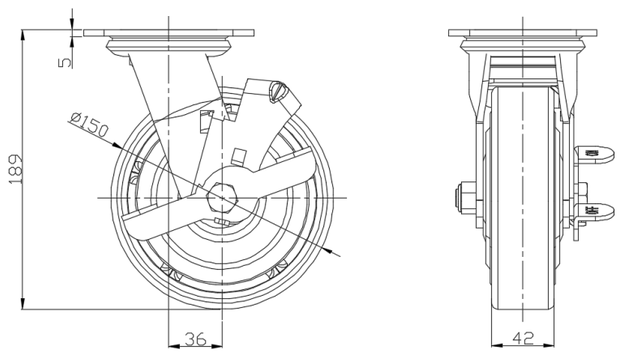

Mounting

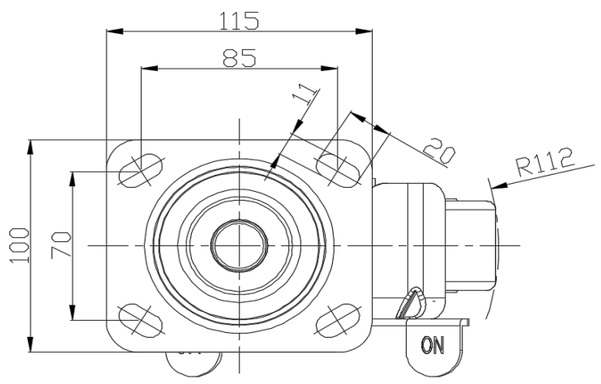

Drawings are for reference only and may differ from the product.

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com

Related Products