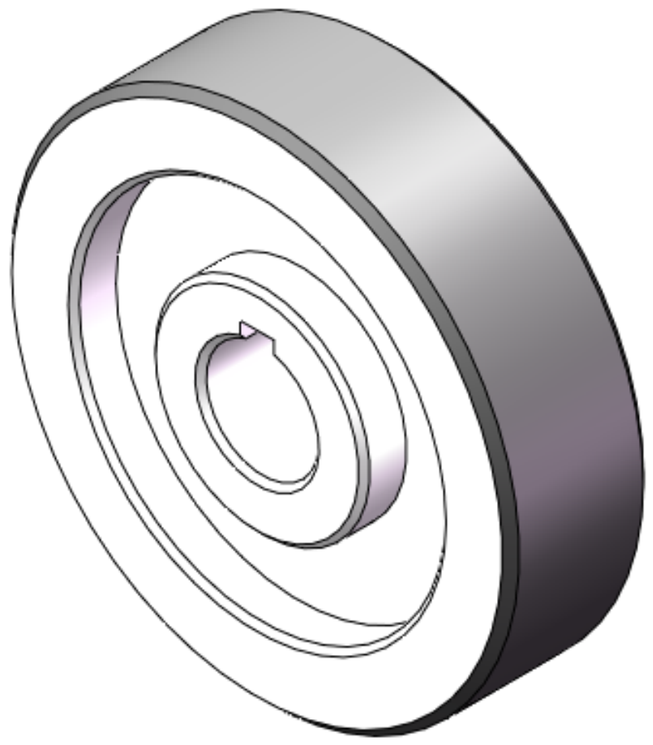

Picture may differ from original product




AHPU Series

Wheel Diameter × Wheel Width 90 x 25mm

YJ-12039653100114 Copy model no.

Wheel Diameter（D）	Tread Pattern	Load Capacity at 6 km/h
3-9/16 "	乱码纹	375lbs

- Excellent Mechanical Properties and wear resistance
- Excellent resistance to chemicals and corrosion
- Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
- HPU dark gray with a machined random pattern texture
- Increases grip on the ground and effectively improves anti-slip performance
- Wheel Center: Aluminum core
- Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

Product Data Sheet

Metric | Imperial

Wheel Diameter（D）	3-9/16 "	Wheel Width（T2）	5-1/25 "
Wheel installation — Hub Lenth (T1)	1 "	Wheel Mounting Bore Diameter	13/16 "
Keyway Width	1/4 "	Wheel Keyway Depth (H)	15/16 "
Load Capacity (Static)	661lbs	Load Capacity at 4 km/h	441lbs
Load Capacity at 6 km/h	375lbs	Load Capacity at 10 km/h	309lbs
Load Capacity at 16 km/h	176lbs	Hardness Of Tread	80±5° Shore A
Temperature	-4°F to +158°F	Tread Pattern	乱码纹
Wheel centre/ rim	Aluminum core/passivation	Non-Marking	Y
Conductive	N/A	Anti	N/A
Weight	0.6lbs	Standard	ISO22883

* For any deviation between metric and imperial spec, please refer to the metric spec.

Performance

Rolling Smoothness
Max. 5 points Score: 5

Quiet Operation
Max. 5 points Score: 4

Floor Surface Preservation
Max. 5 points Score: 5

© 2026 DERSHENG CO., LTD. All rights reserved.