Product Data Sheet


# 1102 B Type Caster Series

DERSHENG
Dersheng Casters Keep Rolling

Non-marking NBR Rubber (milling) Wheel Diameter x Wheel Width 150 x 40mm

EAN

KS-11020600044121

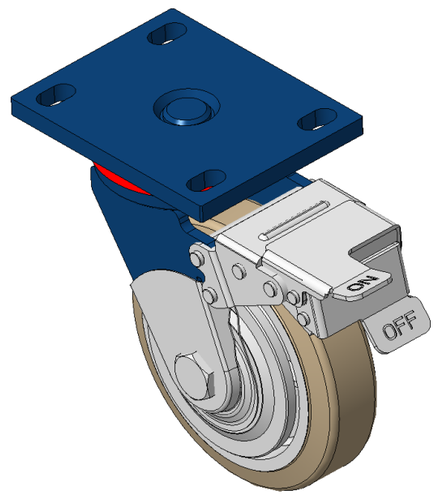


Picture may differ from original product

Casters with Front Brake locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron Wheel Center, High-Quality, highly Resilient Rubber tread, Cast Iron in Natural Color Bearing—Ball Bearing with special Anti-thread wheel cover

Wheel Tread: high quality and high elastic rubber wheel surface

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

## Technical Data


◉ Metric ○ Imperial

| | |
|---|---|
| Wheel Diameter | 150mm |
| Wheel Width | 40mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 140 x 110mm |
| Bolt Hole Spacing | 110x75mm |
| Plate Hole | 22 x 13mm |
| Offset | 42mm |
| Swivel Interference | 324mm |
| Overall Height | 197mm |
| Swivel Radius | 162mm |
| Hardness Of Tread | 85±5° Shore A |
| Load Capacity (Dynamic) | 300kgs |
| Load Capacity (Static) | 450kgs |
| Temperature | -20°C to +80°C |
| Fork Type | Swivel Caster With Front Brake |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 5.02kgs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ● ● ● ○ ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

## Dimensions

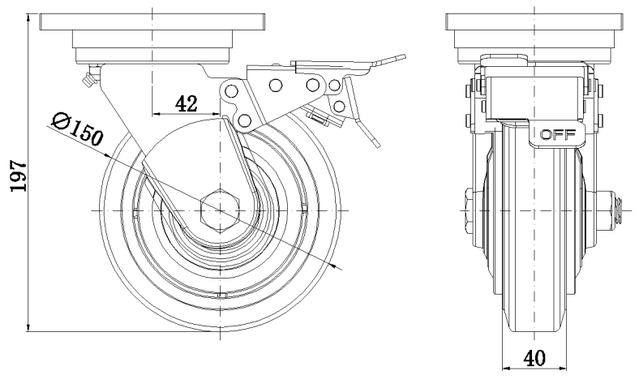


## Mounting

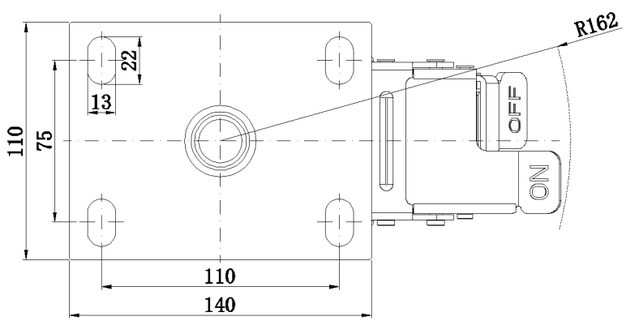


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com