
# 1102 B Type Caster Series

Non-marking NBR Rubber (milling) Wheel Diameter x Wheel Width 200 x 44mm

EAN

KS-11020800044111

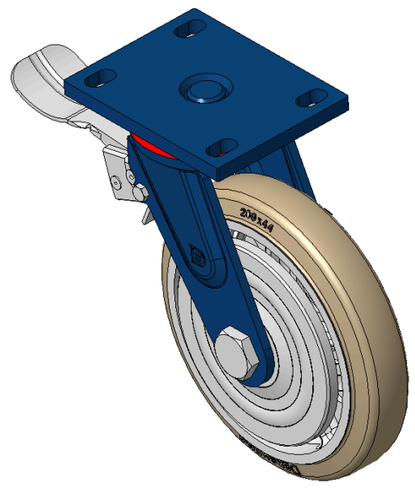

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


◉ Metric ○ Imperial

| | |
|---|---|
| Wheel Diameter | 200mm |
| Wheel Width | 44mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 140 x 110mm |
| Bolt Hole Spacing | 110x75mm |
| Plate Hole | 22 x 13mm |
| Offset | 62mm |
| Swivel Interference | 328mm |
| Overall Height | 248mm |
| Swivel Radius | 164mm |
| Hardness Of Tread | 85±5° Shore A |
| Load Capacity (Dynamic) | 350kgs |
| Load Capacity (Static) | 525kgs |
| Temperature | -20°C to +80°C |
| Fork Type | Swivel Caster With Rear Brake |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 6.45kgs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ●●●○○ |
| Operating Noise | ●●●●○ |
| Floor Surface Preservation | ●●●●○ |

## Dimensions

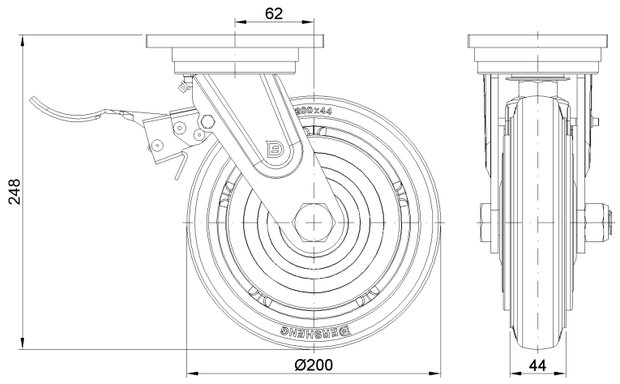


## Mounting

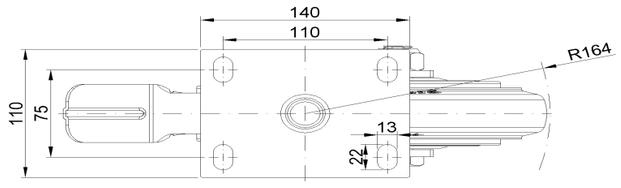


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com