
Product Data Sheet

# 1112-1 2" Wide General Purposes Caster Series

W Resolute (Pearlescent Light Gray) Wheel Diameter × Wheel Width 200 × 50mm

A

KS-11120801454031

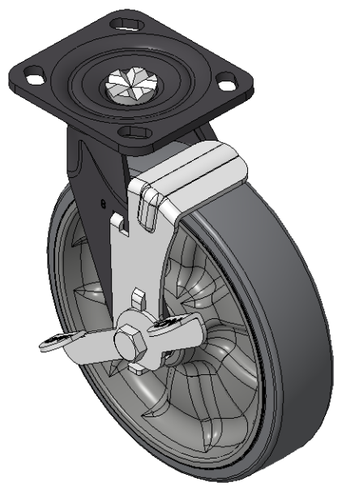

Picture may differ from original product

Side-brake Casters, Welded Caster Fork, black paint finish. Base plate Mounting Type device, 85x70mm Bolt Hole Spacing. Reinforced Polypropylene rubber elastomer (TPR), Cast Iron red. Bearings—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: High-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

## Technical Data


◉ Imperial ○ Metric

| | |
|---|---|
| Wheel Diameter | 8 " |
| Wheel Width | 2 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 4-9/16 " x 4 " |
| Bolt Hole Spacing | 3-3/8 " x 2-3/4 " |
| Plate Hole | 13/16 " x 3/8 " |
| Offset | 1-11/16 " |
| Swivel Interference | 11-1/2 " |
| Overall Height | 9-1/2 " |
| Swivel Radius | 5-13/16 " |
| Hardness Of Tread | 72±5° Shore A |
| Load Capacity (Dynamic) | 948lbs |
| Load Capacity (Static) | 1422lbs |
| Temperature | -4°F to +140°F |
| Fork Type | Swivel Caster With Directional Lock |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 6.2lbs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ● ● ● ● ● |
| Operating Noise | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

## Dimensions

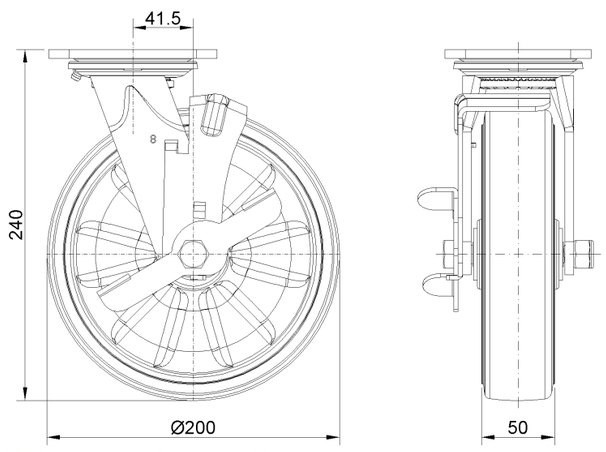


## Mounting

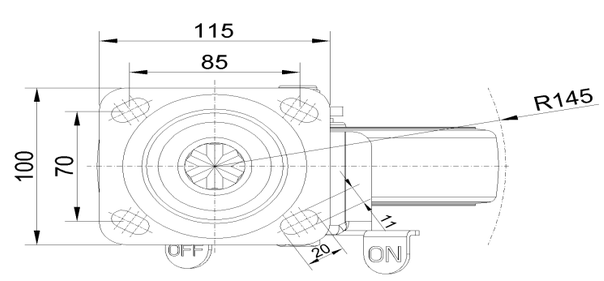


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com