
Product Data Sheet

# 1155-1 Light Plastic-1 Series

Classic PPR Wheel (Middle Tube Black-Black) Wheel Diameter×Wheel Width 125×31mm

EAN

KS-11550593267083

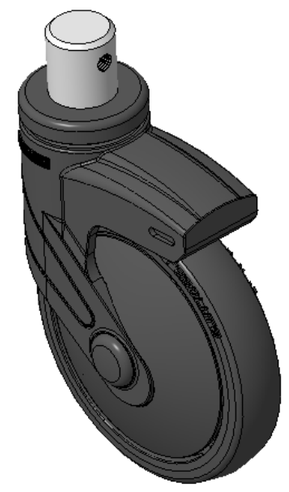

Picture may differ from original product

Rigid Casters, pin rivets—Ø28x30L Black legs made of polyamide reinforcement, pin-mounted. Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation. High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Black, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

## Technical Data


◉ Imperial ○ Metric

| | |
|---|---|
| Wheel Diameter | 5 " |
| Wheel Width | 1 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Stem Diameter | 1-1/8 " |
| Stem Length | 1-3/16 " |
| Offset | 1-1/2 " |
| Overall Height | 6-1/2 " |
| Hardness Of Tread | 82±5° Shore A |
| Load Capacity (Dynamic) | 198lbs |
| Load Capacity (Static) | 298lbs |
| Temperature | -4°F to +140°F |
| Fork Type | Rigid Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 1.7lbs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ● ● ● ● ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

## Dimensions

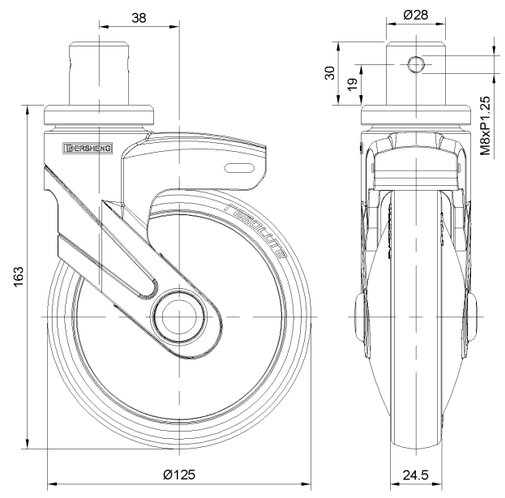


## Mounting

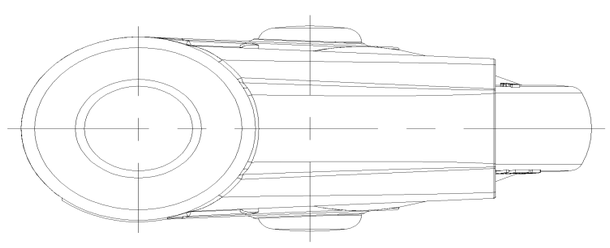

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com