
Product Data Sheet

# 1156 56 Series Central Locking Caster Series

Resolute(white dark gray) Wheel Diameter x Wheel Width 125 x 31mm

EAN

KS-11560500458313

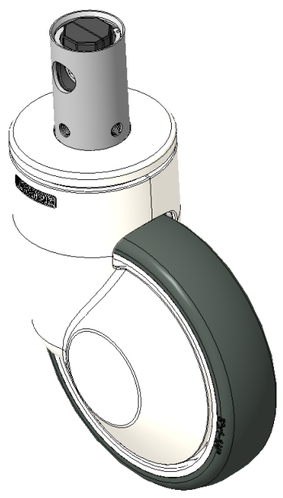

Picture may differ from original product

Short lever, Hexagonal hole cam control, center-locking, full-brake Caster
Steel plate frame with white exterior Decorative Plastic Cover
Rust-proof, Corrosion resistant, Attractive appearance, and rotates smoothly
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

## Technical Data


◉ Imperial ○ Metric

| | |
|---|---|
| Wheel Diameter | 5 " |
| Wheel Width | 1-1/4 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Stem Diameter | 1-5/16 " |
| Stem Length | 3-7/8 " |
| Offset | 1-3/8 " |
| Swivel Interference | 7-3/4 " |
| Overall Height | 6-5/16 " |
| Swivel Radius | 3-15/16 " |
| Hardness Of Tread | 72±5° Shore A |
| Load Capacity (Dynamic) | 265lbs |
| Load Capacity (Static) | 413lbs |
| Temperature | -4°F to +140°F |
| Fork Type | Swivel Caster With Total Brake |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 2.3lbs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ● ● ● ● ● |
| Operating Noise | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

## Dimensions

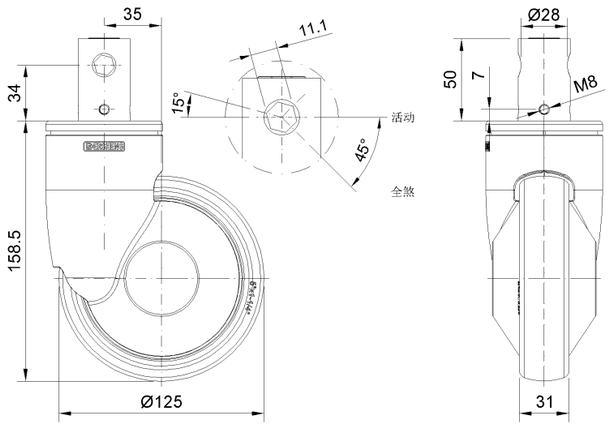


## Mounting

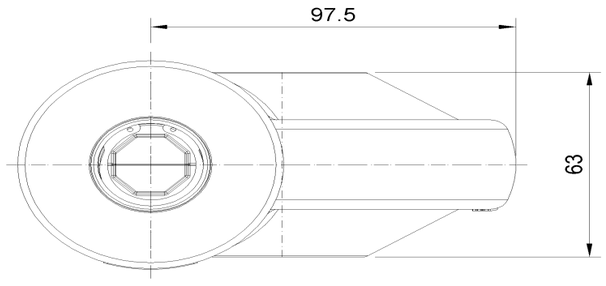


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com