
Product Information Sheet

MRC Series

MRC (Transparent) Wheel Diameter × Wheel Width 100 x 32mm

D

KS-12020704131372

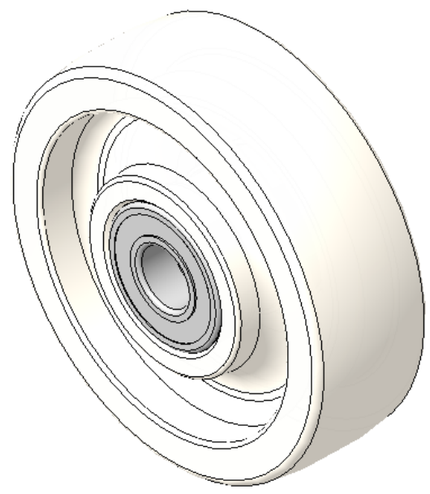

Picture may differ from original product

Impact resistant, scratch-resistant, Not Be Dyed, corrosion resistant, highly abrasion resistant, Odorless. Resistant to many chemical corrosions, Heavy Load, very low Rolling Resistance. Color: Original color.

Wheel Center: Thermoplastic (PA6)
Outer packaging: Thermoplastic (PA6)
Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product

Technical Data


◉ Imperial ○ Metric

Wheel Diameter(D)	4 "
Wheel Width(T2)	1-5/16 "
Wheel Bearing	Ball Bearing
Axle Bore(d)	9/16 "
Axle Bore(S)	—
Bearing Bore Depth(t)	—
Hub Lenth(T1)	1-15/16 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	551lbs
Load Capacity (Static)	827lbs
Temperature	-4°F to +176°F
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.6lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

2D Dimensional Drawing of Single Wheel

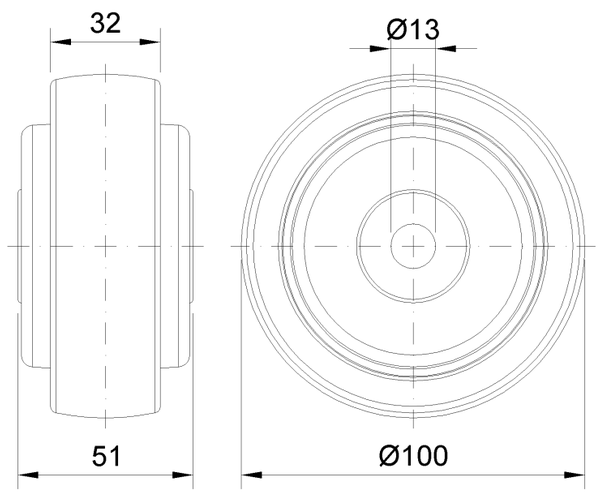

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com