Product Information Sheet

1109 Medium Duty/Low Profile Business Machine Caster Series

Anti-static ZQPU Wheel (milling black) Wheel Diameter x Wheel Width 50 x 20（41.5）mm

EAN


YJ-11090200805033

Portable Casters, Threaded Stem Stamping Fork—3/8"-16UNC
Zine-Plated, Mounting Type - Threaded Stem hardware
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread
Black, Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

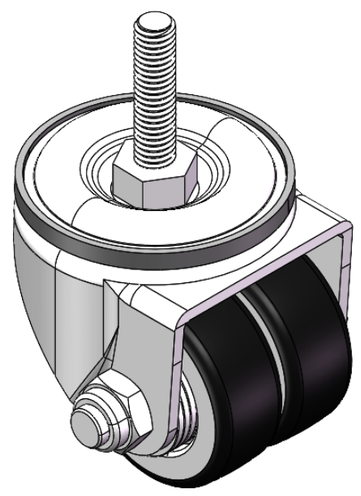

Picture may differ from original product

Technical Data


◉ Metric ○ Imperial

Wheel Diameter	50mm
Wheel Width	42.5mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	3/8 " -16UNC
Threaded Length	38mm
Offset	17mm
Swivel Interference	94mm
Overall Height	70mm
Swivel Radius	47mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	100kgs
Load Capacity (Static)	150kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	Y 10^6/～10^9/Ω
Weight	0.95kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

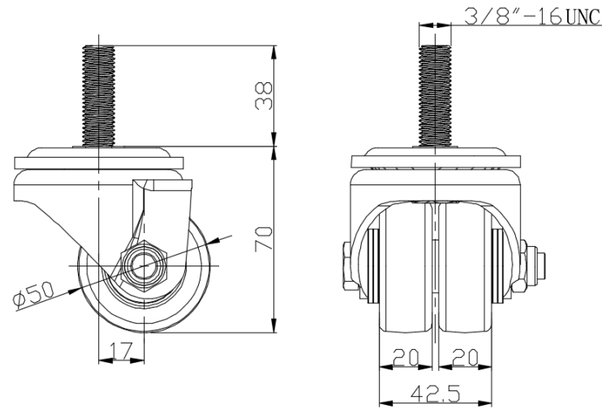

Mounting

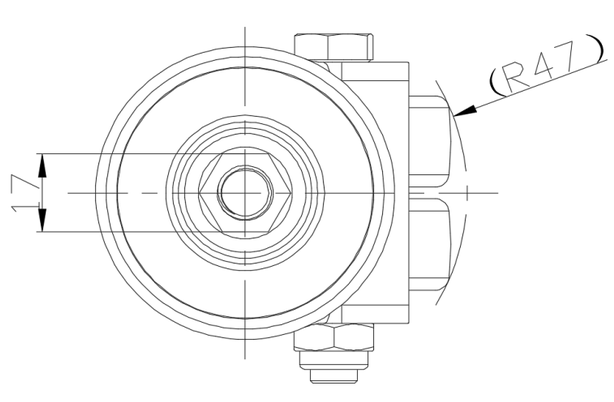

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com