Product Data Sheet

# 1139 Medium Duty General Purposes Caster Series

Rubber Wheel Diameter × Wheel Width 125 x 30.5mm

EAN


YJ-11390500066023

Casters with Total Brakes and With locking system. Threaded Stem Riveted Pressed Fork —1/2"-13"
Zine-Plated, Mounting Type - Threaded Stem
Reinforced Polypropylene Wheel Center, High-Quality Resilient Rubber Wheel Tread Wheels—Central tube

Wheel surface: high-quality elastic rubber

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

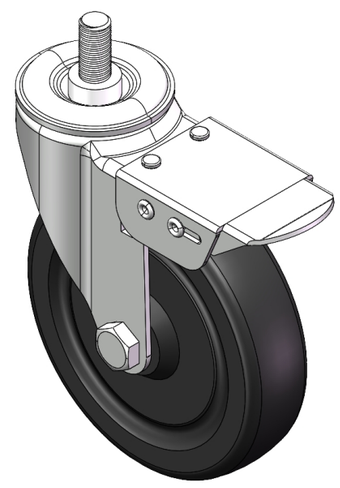

Picture may differ from original product

## Technical Data


◉ Metric ○ Imperial

| | |
|---|---|
| Wheel Diameter | 125mm |
| Wheel Width | 30.5mm |
| Wheel Bearing | Wheel With Plain Bearing |
| Threaded Stem | 1/2 " -13 |
| Threaded Size | 25mm |
| Offset | 38mm |
| Swivel Interference | 230mm |
| Overall Height | 154mm |
| Swivel Radius | 115mm |
| Hardness Of Tread | 80±5° Shore A |
| Load Capacity (Dynamic) | 90kgs |
| Load Capacity (Static) | 135kgs |
| Temperature | -20°C to +120°C |
| Fork Type | Swivel Caster With Total Brake |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 1.30kgs |
| Standard | ISO22883 |


## Advantages at a glance

| | |
|---|---|
| Rolling Resistance | ● ● ● ○ ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

## Dimensions

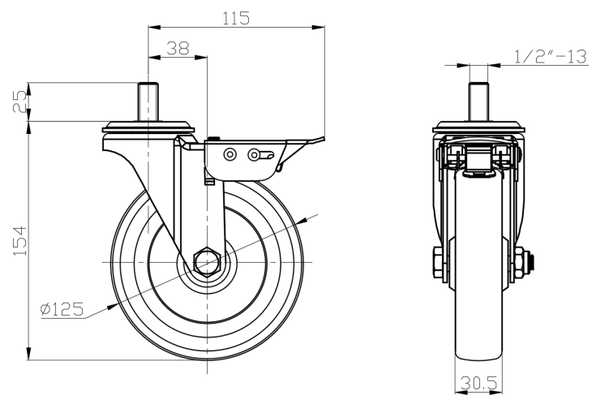


## Mounting

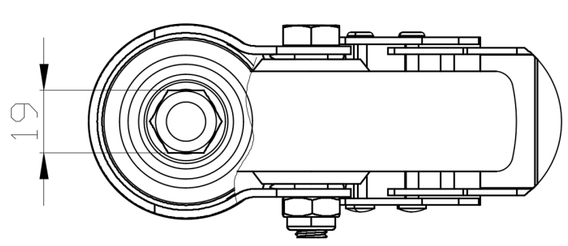


* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com