Product Data Sheet


1139 Medium Duty General Purposes Caster Series

DERSHENG
Dersheng Casters Keep Rolling

Rubber Wheel Diameter × Wheel Width 125 x 30.5mm

EAN

YJ-11390500066023

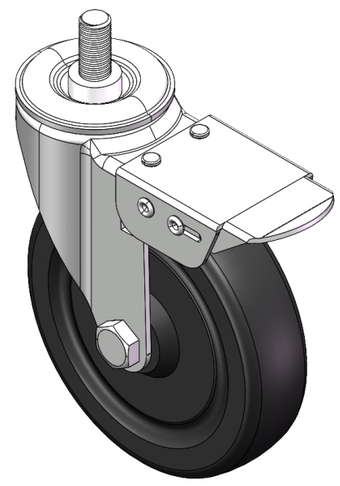

Picture may differ from original product

Casters with Total Brakes and With locking system. Threaded Stem Riveted Pressed Fork —1/2"-13"
Zine-Plated, Mounting Type - Threaded Stem
Reinforced Polypropylene Wheel Center, High-Quality Resilient Rubber Wheel Tread Wheels—Central tube

Wheel surface: high-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Technical Data


◉ Imperial ○ Metric

Wheel Diameter	5 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	1/2 " -13
Threaded Size	1 "
Offset	1-1/2 "
Swivel Interference	9-1/8 "
Overall Height	6-1/8 "
Swivel Radius	4-9/16 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	198lbs
Load Capacity (Static)	298lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.9lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

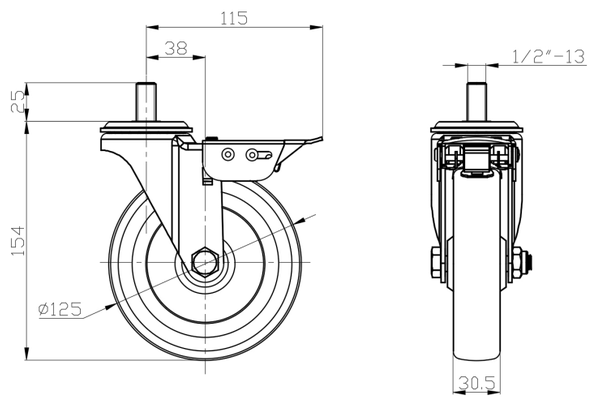

Mounting

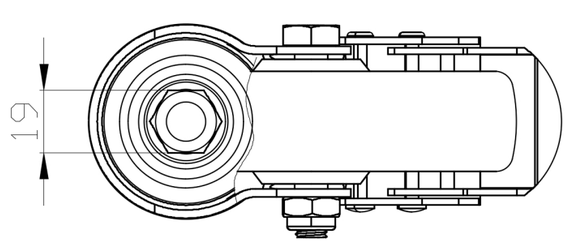

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com