Product Data Sheet

1139 Medium Duty General Purposes Caster Series

PP (black) Wheel Diameter x Wheel Width 125 x 35mm

EAN


YJ-11390500291053

Rigid castors, Stamping Fabricated Caster Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacings Extended control lever surface, Top Plate installation Polypropylene Wheel Center, Wheel Tread Black, wheels—Plain Bearing.

Wheel tread: PP polypropylene

Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

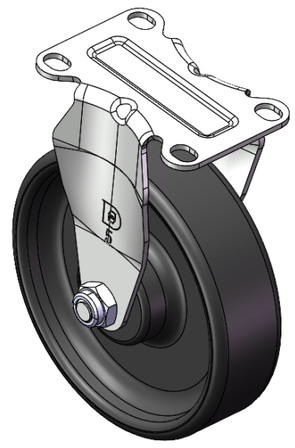

Picture may differ from original product

Technical Data


◉ Imperial ○ Metric

Wheel Diameter	5 "
Wheel Width	1-7/16 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	3-11/16 " x 2-9/16 "
Bolt Hole Spacing	3 " x 1-13/16 "
Plate Hole	1/2 " x 23/64 "
Overall Height	6-5/16 "
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	441lbs
Load Capacity (Static)	661lbs
Temperature	14°F to +140°F
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.9lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

Dimensions

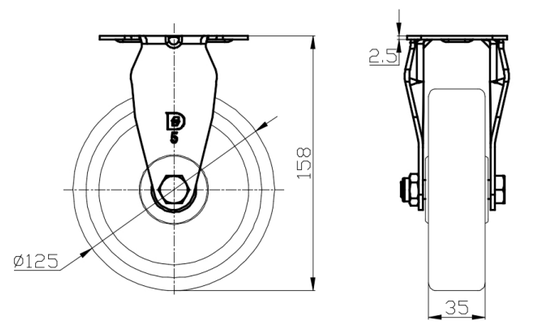

Mounting

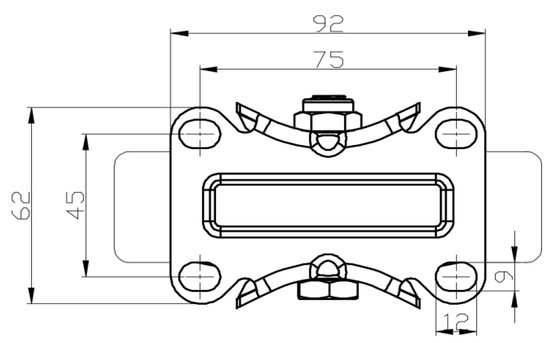

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com