Product Data Sheet

1139 Medium Duty General Purposes Caster Series

PP (black) Wheel Diameter x Wheel Width 125 x 35mm

EAN


YJ-11390500292053

Swivel Casters, Top Plate Riveted Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacings Extended control lever surface, Top Plate (4T) installation device Polypropylene Wheel Center, Wheel Tread Black, wheels—Plain Bearing.

Wheel tread: PP polypropylene

Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

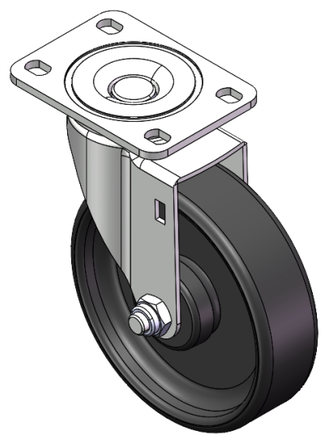

Picture may differ from original product

Technical Data


◉ Imperial ○ Metric

Wheel Diameter	5 "
Wheel Width	1-7/16 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	3-13/16 " x 2-9/16 "
Bolt Hole Spacing	
Plate Hole	1/2 " x 23/64 "
Offset	1-1/2 "
Swivel Interference	8-1/16 "
Overall Height	6-5/16 "
Swivel Radius	4-1/16 "
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	441lbs
Load Capacity (Static)	661lbs
Temperature	14°F to +140°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.6lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

Dimensions

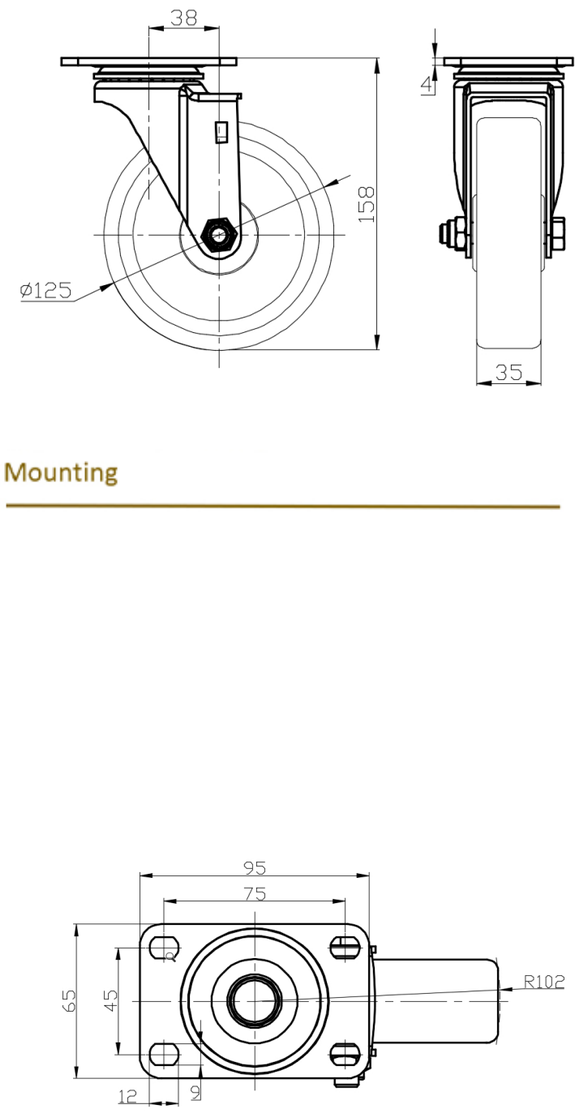

Mounting

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com