Product Data Sheet

1151D Heavy Duty 1.5" Wide General Purposes Caster Series

QPU (Blue flat) Wheel Diameter × Wheel Width 150 x 42mm

EAN


YJ-11510600532023

Swivel Caster with Riveted Fork and Stamping Fork – 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Zine-Plated, Fork-mounted (4T) Mounting Type system Cast Iron Wheel Center, High Quality Polyurethane tread Blue color, Bearing – Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

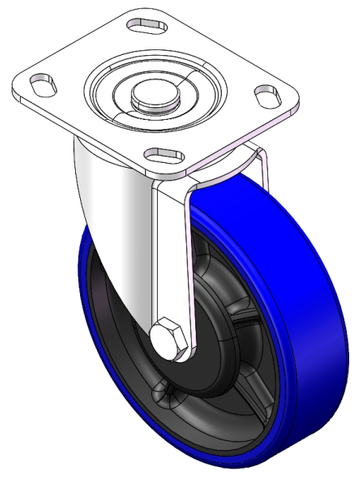

Picture may differ from original product

Technical Data


◉ Metric ○ Imperial

Wheel Diameter	150mm
Wheel Width	42mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	40mm
Swivel Interference	232mm
Overall Height	188mm
Swivel Radius	116mm
Hardness Of Tread	87±5° Shore A
Load Capacity (Dynamic)	450kgs
Load Capacity (Static)	675kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.58kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

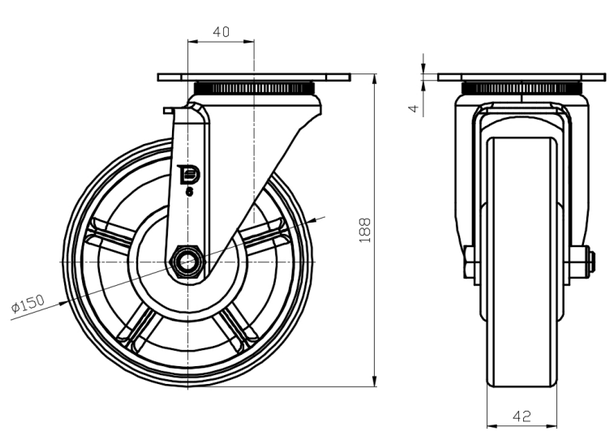

Mounting

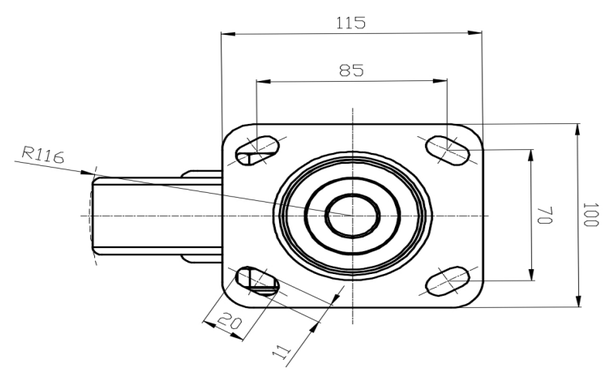

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com